

Features & Benefits

- Low pressure drop
- High dirt holding capacity
- zero hold up design
- Permanently piped housing are opened without special tools and without disturbing the piping
- Machined cover gasket groove provide positive O-Ring sealing
- Easy clean ability
- In-line inlet and outlet high flow rates
- Positive sealing arrangement to avoid bypassing
- Suitable for double open end (DOE), Code 7 (226 O-Ring) & 222 O-Ring type filter cartridge
- accommodates 10", 20", 30", 40", 50" & 60" long filter cartridges.
- End connections for 3/4" to 24" pipe
- V posts or threaded center posts
- Quick opening tri clovers design
- Easy to operate & low maintenance
- Low down time
- Flow rate up to 2000 m³/hr
- Custom design services
- Housings are permanently piped
- All housings made from SS 316 L, SS 316 & SS 304 are mirror polished & electro polished to resist adhesion of dirt and scale
- Carbon steel housings are sand blasted, epoxy coated & finally painted with two coats of synthetic enamel
- ASME code stamp available
- Duplex / Triplex / Jacketed cartridge filter unit designs are available
- High temperature & high pressure design are available

Cartridge filter housing suitable for filter cartridges of

- Double Open End (DOE) Type
- Code 7 (226 O Ring) Design
- Code 3 (222 O Ring) Design
- NPT Threaded Connection Type

Gasket / O Ring Material

- Neoprene
- Nitrile
- Silicone
- Viton
- Buna N
- EPDM
- PTFE

End connections available

- NPT / BSP Threaded
- Flanged Table E / Table F
- ANSI B 16.5 Flanged
- DIN Standard
- Tri Clover Adaptors
- SMS /Dairy End Connection

Applications

• Pharmaceuticals	• Petroleum Derivatives
• Water Treatment	• Coolants
• Paints & Inks	• Food & beverages
• Bore Well water	• Dairy
• Dyes & Intermediates	• RO Pre filtration
• Processing Chemicals	• & Many More

Special Options

- Sanitary fittings and construction
- Higher pressure rating
- Housings of alloy steel
- Corrosion allowances
- Steam jackets
- Special outlet locations
- Optional cartridge sealing methods for 226, NPT, etc.
- High temperature gasket designs

Technical Specifications

Sizes (Cartridge filter housings suitable for)


- 1 No. To 200 Nos. Of Cartridges in Single Housing
- 2", 2.5", 4", 6" & 8" Diameter of Cartridge
- 10", 20", 30", 40", 50" & 60" Long Filter cartridge

Flow Rate

- Capacity : Up to 2000 m³/hr

Material of construction

- SS 316L • SS 316 • SS 304 • CARBON STEEL (ALL GRADE) • MILD STEEL • ALLOY METALS
- POLYPROPYLENE • LEAD LINING on Any Metal
- RUBBER LINING on Any Metal
- TEFLON LINING on Any Metal
- TEFLON coating on any metal

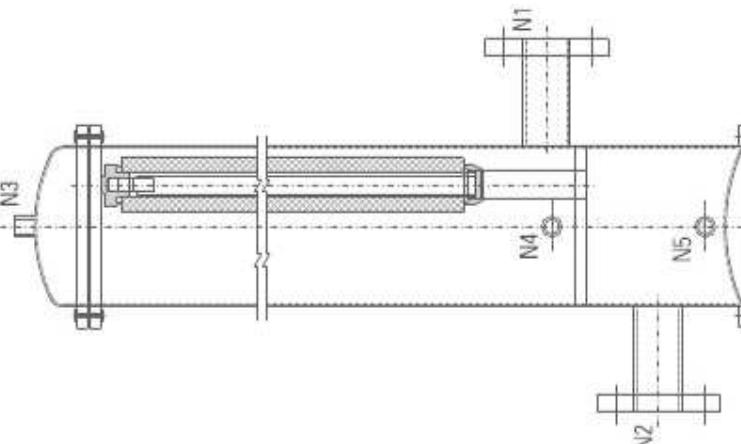

STANDARD THOLEN

Cartridge Filter Housing



Cartridge filter system offers wide range of flow capacities & contaminant holding capacities. Cartridge filter housing diameters can accommodate from 1 to 200 cartridges around. Cartridge filters are normally used as polishing filter in almost all process industries. Cartridge filter is constructed of filter housing, filter cartridges, tube sheet, positive sealing arrangement for cartridge depending upon type of cartridge & choice of end connections. Positive sealing arrangement for cartridge filter assures no particle migration or fiber migration, even after high differential pressures.

Operation

Contaminated fluid enters the housing and is distributed evenly around the filter cartridges. Filtration takes place from outside to inside. Solids are collected on the outside of filter cartridges & clear filtrate collected at outlet.